



MEGACOAT Ceramic

PT600M

MEGACOAT Ceramic PT600M achieves superior tool life for Hardened Material and Cast Iron Machining

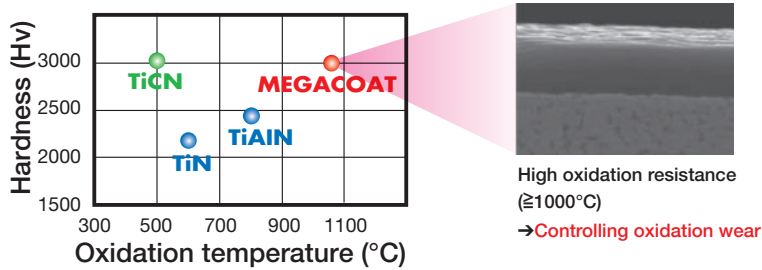
Advantages

- Special PVD coating controls crater wear and achieves stable machining with superior oxidation resistance
- Sudden fracture is controlled through miniaturization of the ceramic structure



MEGACOAT

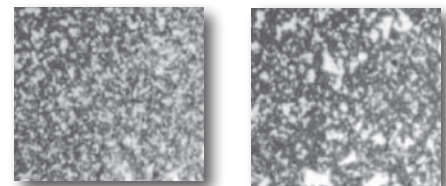
Special PVD coating controls crater wear and achieves stable machining with superior oxidation resistance.



Ceramic substrate characteristics

Static property comparison of PT600M and Conv. A

Grade	Hardness (GPa)	Fracture Toughness (MPam ^{1/2})	Transverse Strength (MPa)	Oxidation resistance* (mg/cm ²)
PT600M	20.0	4.1	1000	2.1
Conv. A	19.0	4.3	850	2.8



PT600M

Conv. A

PT600M achieves miniaturization of the structure

*Oxidation resistance: Evaluated for one hour at 1200°C

Recommended cutting conditions

Hardened material ($r_{\epsilon}=0.8\text{mm}$)

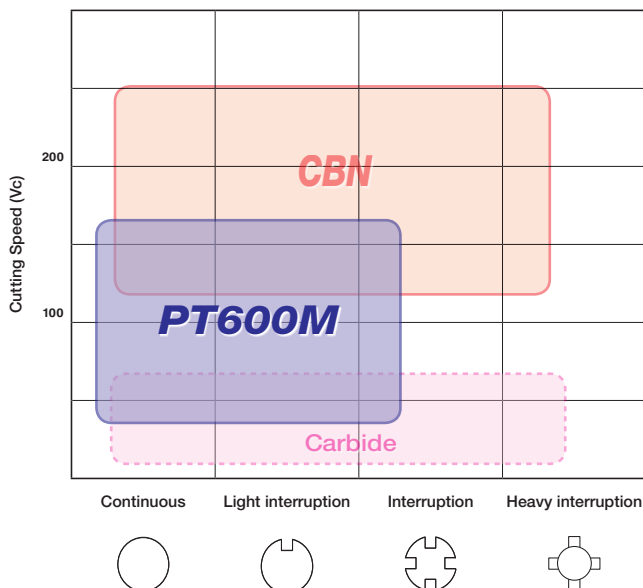
Hardness of workpiece material	Vc (m/min)	ap (mm)	f (mm/rev.)
40~50HRC	60-80-100	0.2-0.5-0.7	0.05-0.1-0.15
50~65HRC	30-40-60	0.2-0.5-0.7	0.05-0.1-0.15

Gray cast iron ($r_{\epsilon}=0.8\text{mm}$)

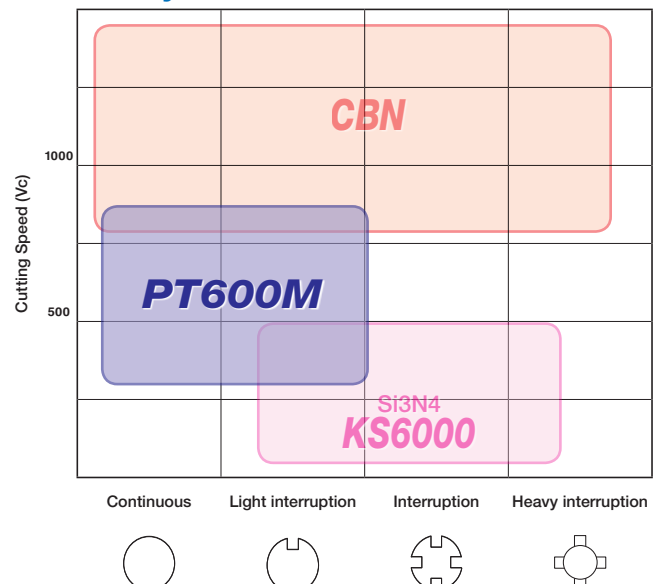
Workpiece material	Vc (m/min)	ap (mm)	f (mm/rev.)
GG25-GG30	300-450-600	0.3-0.5-1.0	0.1-0.2-0.3

Application range

Hardened material



Gray cast iron








Standard Items (Negative Type Inserts)

Shape	Description	Edge Preparation	Dimension(mm)			
			A	T	ød	rε
	CNGA 120404S02025	S02025	12.70	4.76	5.16	0.4
	120408S02025					0.8
	120412S02025					1.2
	CNGA 120404T02025	T02025	12.70	4.76	5.16	0.4
	120408T02025					0.8
	120412T02025					1.2
	CNGN 120404T00520	T00520	12.70	4.76	-	0.4
	120404T02025	T02025				0.4
	120408T00520	T00520				0.8
	120408T02025	T02025				0.8
	120412T02025					1.2
	120412T02025					1.2
	DNGA 150404S02025	S02025	12.70	4.76	5.16	0.4
	150408S02025					0.8
	150404T02025					T02025
	150408T02025	0.8				
	150412T02025	1.2				
	DNGA 150604T02025	T02025	12.70	6.35	5.16	0.4
	150608T02025					0.8
	150612T02025					1.2
		DNGN 150408T02025	T02025	12.70	4.76	-
DNGN 150704S02025		S02025	12.70	7.94	-	0.4
150708S02025						0.8
150712S02025						1.2
	ENGN 130708S02025	S02025	12.70	7.94	-	0.8
	130712S02025					1.2
	ENGN 130704T02025	T02025	12.70	7.94	-	0.4
	130708T02025					0.8
	130712T02025					1.2
	130716T02025					1.6
130720T02025	2.0					
130730T02025	3.0					
	RNGN 090400S02025	S02025	9.525	4.76	-	-
	120400S02025		12.70			-
	120700S02025		7.94	-		
	150700S02025			15.875	-	
	150700S02025			-		
	RNGN 090400T02025	T02025	9.525	4.76	-	-
	120400T02025		12.70			-
	120700T02025		7.94	-		
	150700T02025			15.875	-	
	150700T02025			-		
RNGN 120700K15015	K15015	12.70	7.94	-	-	


Shape	Description	Edge Preparation	Dimension(mm)			
			A	T	ød	rε
	SNGA 120408S02025	S02025	12.70	4.76	5.16	0.8
	120412S02025					1.2
	SNGA 120408T02025	T02025	12.70	4.76	5.16	0.8
	120412T02025					1.2
	120416T02025					1.6
	SNGN 120408S02025	S02025	12.70	4.76	-	0.8
	120412S02025					1.2
	120416S02025					1.6
	SNGN 120404T02025	T02025	12.70	4.76	-	0.4
	120408T02025					0.8
	120412T02025					1.2
	120416T02025					1.6
	120420T02025					2.0
	120420T02025					2.0
	SNGN 120704S02025	S02025	12.70	7.94	-	0.4
	120708S02025					0.8
	120712S02025					1.2
120716S02025	1.6					
120720S02025	2.0					
SNGN 120704T02025	T02025	12.70	7.94	-	0.4	
120708T02025					0.8	
120712T02025					1.2	
120716T02025					1.6	
120720T02025					2.0	
SNGN 150712T02025	T02025	15.875	7.94	-	1.2	
150716T02025					1.6	
	TNGA 160404S02025	S02025	9.525	4.76	3.81	0.4
	160408S02025					0.8
	160412S02025					1.2
	TNGA 160404T02025	T02025	9.525	4.76	3.81	0.4
	160408T02025					0.8
160412T02025	1.2					
	TNGN 110304T00520	T00520	6.35	3.18	-	0.4
	110308T00520					0.8
	110312T00520					1.2
	TNGN 160404S02025	S02025	9.525	4.76	-	0.4
	160408S02025					0.8
	160412S02025					1.2
	TNGN 160404T02025	T02025	9.525	4.76	-	0.4
	160408T02025					0.8
	160412T02025					1.2
	TNGN 160708S02025	S02025	9.525	7.94	-	0.8
	TNGN 160704T02025	T02025	9.525	7.94	-	0.4
	160708T02025					0.8
160712T02025	1.2					
	VNGA 160404S02025	S02025	9.525	4.76	3.81	0.4
	160408S02025					0.8
	VNGA 160404T02025	T02025	9.525	4.76	3.81	0.4
	160408T02025					0.8
	160412T02025					1.2

Standard Items (Positive Type Inserts)





Shape	Description	Edge Preparation	Dimension(mm)			
			A	T	r _e	α
	SPGN 090308T00820	T00820	9.525	3.18	0.8	11°
	SPGN 120308S00820	S00820	12.70	3.18	0.8	
	SPGN 120308T00820	T00820	12.70	3.18	0.8	
	120312T00820				1.2	
	120316T00820				1.6	
	TBGN 060104S00820	S00820	3.97	1.59	0.4	5°
	060108S00820				0.8	
	TBGN 060104T00820	T00820	3.97	1.59	0.4	
	060108T00820				0.8	
	TPGN 090204T00820	T00820	5.56	2.38	0.4	11°
	090208T00820				0.8	
	TPGN 110304S00820	S00820	6.35	3.18	0.4	
	110308S00820				0.8	
	TPGN 110304T00820	T00820	6.35	3.18	0.4	
	110308T00820				0.8	
	TPGN 160304S00820	S00820	9.525	3.18	0.4	
	160308S00820				0.8	
	160312S00820				1.2	
	TPGN 160304T00820	T00820	9.525	3.18	0.4	
	160308T00820				0.8	
	160312T00820				1.2	

Shape	Description	Edge Preparation	Dimension(mm)				
			øD	ød	A	B	F
	RBG 12K20003	K20003	12	6	6	3	0.2
	16K20003		16	8	8	5	0.2
	20K20003		20	10	10	5	0.3
	RCGX 090700P20015	P20015	9.525	-	8	-	-
	120700P20015		12.70	-	8	-	-

Standard Items (Grooving Insert)

Shape	Description	Edge Preparation	Dimension(mm)			
			W	r _e	L	H
	GH 4020-05	T01020	4.0	0.5	20	7.5
	5020-05	T01020	5.0			
	6020-05	T01020	6.0			
	7020-05	T01020	7.0			

Edge preparation

Symbol	Classification		Example	Shape	
	Gray cast iron	Hardened material			
T Chamfered	★	☆	T00520	0.05mm×20° Chamfered	 e.g.) T02025
			T00820	0.08mm×20° Chamfered	
			T01020	0.10mm×20° Chamfered	
			T02025	0.20mm×25° Chamfered	
S Chamfered and honed	☆	★	S00820	0.08mm×20° Chamfered and honed	 e.g.) S02025
			S02025	0.20mm×25° Chamfered and honed	
K Double Chamfered		★	K15015	1.50mm×15° Chamfered	 e.g.) K20003
			K20003	2.00mm×3° Chamfered	
P Double Chamfered and honed			P20015	2.00mm×15° Chamfered and honed	 e.g.) P20015

★:1st. Choice ☆:2nd. Choice

THE NEW VALUE FRONTIER

KYOCERA

KYOCERA
Fin ceramics GmbH
Cutting Tool Division

Hammfelddamm 6,
D-41460 Neuss, Germany
Phone: +49 (0) 2131 1637-0
Fax: +49 (0) 2131 1637-152
ceratip@kyocera.de
www.kyocera.de

KYOCERA
Fin ceramics SAS.
Cutting Tool Division

4, allée du Commandant Mouchotte,
Paray-vieille-poste, F - 91781
Wissous Cedex, France
Phone: +33 (0) 1 45 12 02 20
Fax: +33 (0) 1 46 86 01 33
sales.france@kyocera.de

KYOCERA
Fin ceramics GmbH sp. z o.o.
Poland Branch Office
Cutting Tool Division

Leg. ul. Europejska 4,
55-220, Jelcz-Laskowice, Poland
Phone: +48-(0)71-381-12-15
Fax: +48-(0)71-381-12-16

KYOCERA
Fin ceramics GmbH
Italy Branch Office
Cutting Tool Division

Via Torino 51,
20123 Milan, Italy
Phone: +39-02 00620 845
Fax: +39-02 00620 848