


ПАТРОН ЦАНГОВЫЙ SLB  
С ЦИЛИНДРИЧЕСКИМ ХВОСТОВИКОМ  
SYIC – 06000

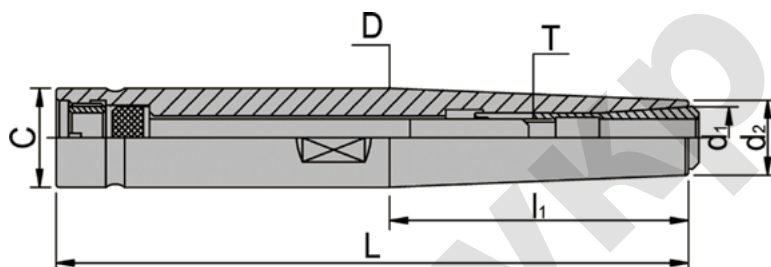

- Сталь: SNCV-21.
- Твёрдость: 44 ~ 48 HRC.
- В стандартную комплектацию патрона SLB (SYIC – 06000) включен гаечный ключ.
- Рекомендуется использовать цангу SLC (SYIC-18851).

Код	Тип	L	l <sub>1</sub>	D	d <sub>1</sub>	d <sub>2</sub>	T	Вес, кг
SYIC-06002	C12xSBL6 -120	120	-	12				0,16
SYIC-06004	C12xSBL6 -150	150						0,18
SYIC-06008	C16xSBL6 -120	120						0,21
SYIC-06010	C16xSBL6 -150	150	48	16				0,22
SYIC-06012	C16xSBL6 -200	200				12		0,24
SYIC-06014	C20xSBL6 -120	120	76,5		9,93		M6 x1,0P	0,22
SYIC-06016	C20xSBL6 -150	150	86	20				0,23
SYIC-06018	C20xSBL6 -200	200	76,5					0,25
SYIC-06020	C25xSBL6 -120	120						0,33
SYIC-06022	C25xSBL6 -150	150	60			14		0,34
SYIC-06024	C25xSBL6 -200	200		25				0,36
SYIC 06026	C25xSBL12-120	120						0,34
SYIC-06028	C25xSBL12-150	150	50		18	22	M10x1,5P	0,35
SYIC-06030	C25xSBL12-200	200						0,37
SYIC-06032	1/2"xSBL6 -5"	127		12,7				0,16
SYIC-06034	1/2"xSBL6 -6"	152,4						0,18
SYIC-06038	5/8"xSBL6 -5"	127	48					0,21
SYIC-06040	5/8"xSBL6 -6"	152,4		15,875				0,22
SYIC-06042	5/8"xSBL6 -8"	203,2				12		0,24
SYIC-06044	3/4"xSBL6 -5"	127			9,93		M6 x1,0P	0,22
SYIC-06046	3/4"xSBL6 -6"	152,4	96	19,05				0,23
SYIC-06048	3/4"xSBL6 -8"	203,2						0,25
SYIC-06050	1"xSBL6 -5"	127						0,33
SYIC-06052	1"xSBL6 -6"	152,4	60			14		0,34
SYIC-06054	1"xSBL6 -8"	203,2		25,4				0,36
SYIC-06058	1"xSBL12 -5"	127						0,34
SYIC-06060	1"xSBL12 -6"	152,4	56		18	22	M10x1,5P	0,35
SYIC-06062	1"xSBL12 -8"	203,2						0,37