

Driven & Static Tool Holder




Axial Tool Holder (External Coolant)

SPUR MT TOEM

- Tool Holder is produced in accordance with DIN 69880.
- ER Collet is according to DIN6499.
- Driven Coupling is according to SPUR MT TOEM.
- For left hand and right hand turret.

R.P.M. : Max. 6,000 RPM

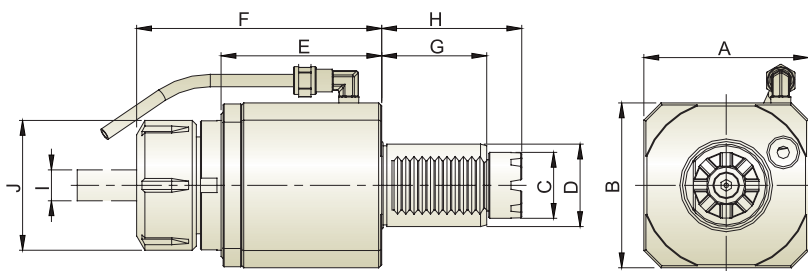


Unit : mm

Model No.	A	B	C	D	E	F	G	H	I	J	N.W.(KG)
THB-A04-30D	62	62	24	30	60.5	87	45	59	ER25 (2~16)	42	1.9
THB-A05-30D	64	64	24	30	64	98	45	59	ER32 (3~20)	50	2.3
THB-A05-40D	78	78	32	40	63	94	51	68	ER32 (3~20)	50	3.3
THB-A06-40D	80	80	32	40	78	119	51	68	ER40 (4~26)	63	4.3
THB-A06-50D	86	86	40	50	82	124	68	84	ER40 (4~26)	63	5.5
THB-A07-60D	104	104	53.2	60	110.5	152	78	110	ER50 (12~34)	78	9.6
THB-A07-80D	158	158	57	80	130	183.5	111	130	ER50 (12~34)	78	23

Axial ER Tapping Tool Holder (External Coolant)

R.P.M. : Max. 3,000 RPM

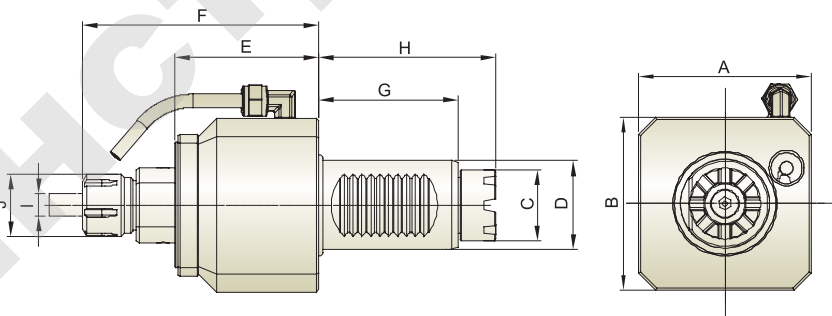

Unit : mm

Model No.	A	B	C	D	E	F	G	H	I	J	N.W.(KG)
THB-A15-40D	78	78	32	40	63	106	51	68	M3~M12	28	3.1