




Driven & Static Tool Holder

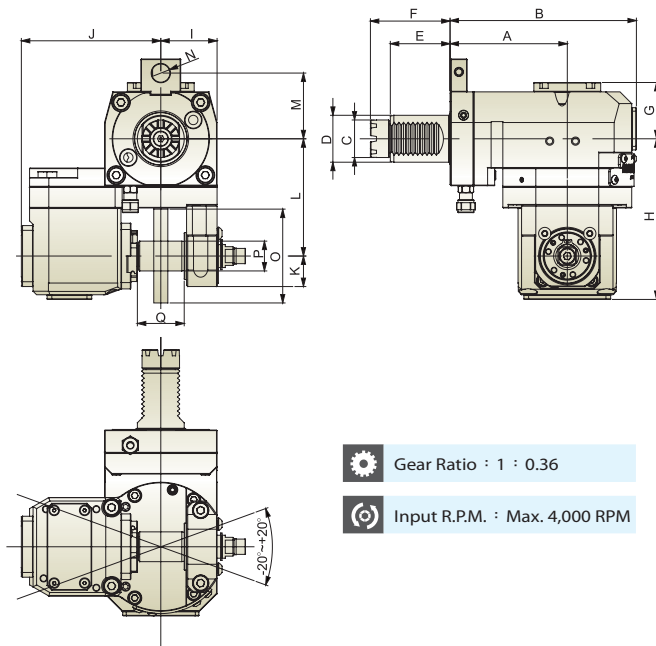

Radial Swivel Gear Hobber Tool Holder (External Coolant)

SPUR MT TOEM



-  Gear Ratio : 1 : 0.36
-  Input R.P.M. : Max. 4,000 RPM

- Tool Holder is produced in accordance with DIN 69880.
- Driven Coupling is according to SPUR MT TOEM.
- For left hand and right hand turret.
- Cutting angle can be set from +20 to -20 degree for various applications.
- Suitable for machining Spur Gear and Bevel Gear.




Unit : mm


Model No.	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	N.W.(KG)
THB-T29.100-40DR0.36	100	159	32	40	51	68	48	137	48	119	26	100	56/63/70	15.5	80	22/25.4/27/31.75	40	11.7

Axial Tool Holder (External Coolant)

HAAS

- Tool Holder is produced in accordance with DIN 69880.
- Driven Coupling is according to HAAS.
- ER Collet is according to DIN 6499.
- For left hand and right hand turret.

-  R.P.M. : Max. 6,000 RPM

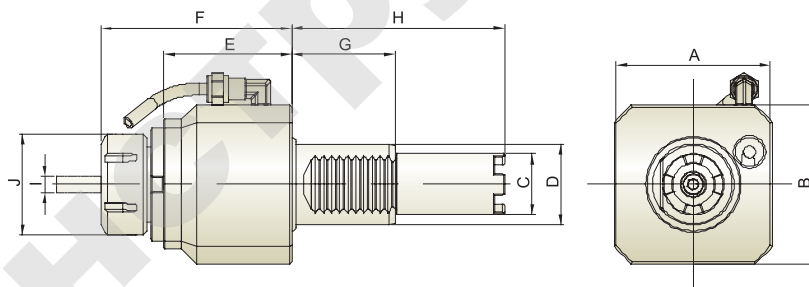

Unit : mm

Model No.	A	B	C	D	E	F	G	H	I	J	N.W.(KG)
THB-A05-40E	78	78	30	40	63	94	51	104.85	ER32 (3~20)	50	3.4
THB-A05-40F	78	78	30	40	63	94	51	117.55	ER32 (3~20)	50	3.4
THB-A06-40E	80	80	30	40	78	119	51	104.85	ER40 (4~26)	63	4.4
THB-A06-40F	80	80	30	40	78	119	51	117.55	ER40 (4~26)	63	4.4