

Driven & Static Tool Holder




Radial Offset Tool Holder (External Coolant)

SPUR MT TOEM

- Tool Holder is produced in accordance with DIN 69880.
- ER Collet is according to DIN6499.
- Driven Coupling is according to SPUR MT TOEM.
- For left hand and right hand turret.

- ⚙ Gear Ratio : 1 : 1
- ⚙ R.P.M. : Max. 4,000 RPM

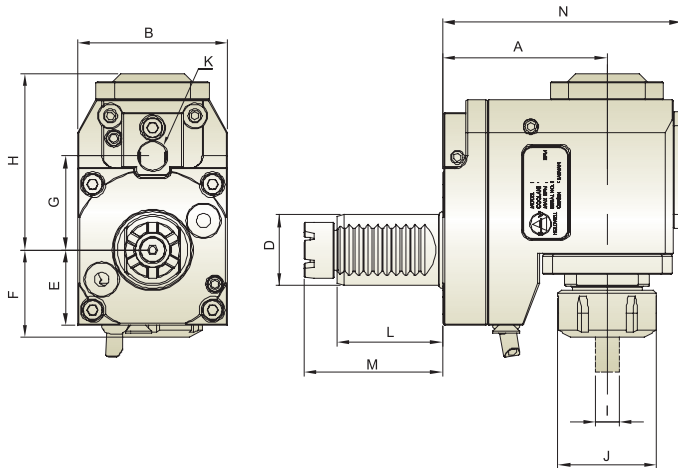


Unit : mm

Model No.	A	B	D	E	F	G	H	I	J	K	L	M	N	N.W.(KG)
THB-D04.70-30D	70	64	30	32	37	40/63	75	ER25 (2~16)	42	12	45	59	101.5	4.0
THB-D05.90-40D	90	80	40	38	31.5	63/70	102	ER32 (3~20)	50	16	51	68	125.5	7.2
THB-D07.102-60D	102	104	60	54	75	89	116	ER40 (4~26)	78	16	78	100	154	14

※ Further option : 6000 RPM

Radial Offset Tool Holder (Internal Coolant)

- ⚙ Gear Ratio : 1 : 1
- ⚙ R.P.M. : Max. 4,000 RPM
- ⦿ Internal Coolant : 70 bar

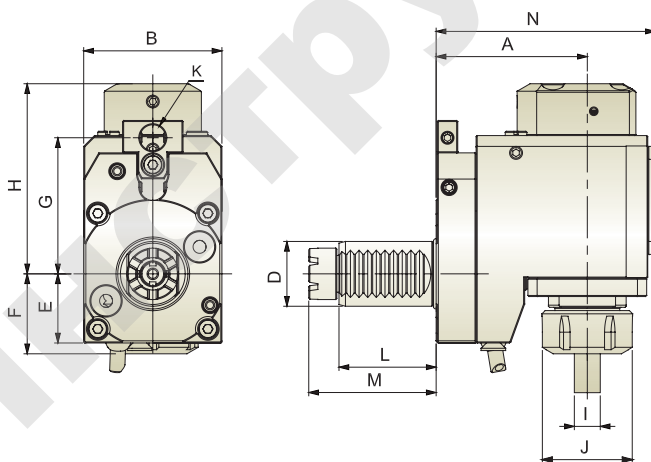

Unit : mm

Model No.	A	B	D	E	F	G	H	I	J	K	L	M	N	N.W.(KG)
THB-D04.70-30DI	70	64	30	32	37	40/63	97	ER25 (2~16)	42	12	45	59	101.5	4.0
THB-D05.90-40DI	90	80	40	38	31.5	63/70	124	ER32 (3~20)	50	16	51	68	125.5	7.2

※ Further option : 6000 RPM