





# Boring Bars 內孔車刀

C-SDQC  
E-SDQC  
S-SDQC  
107.5°

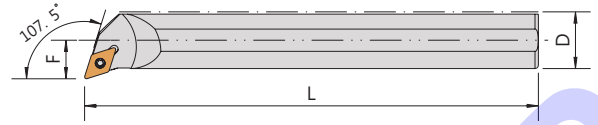

C-Carbide Shank 鎢鋼柄  
S-Steel Shank 鋼柄  
E-Carbide Shank with Coolant 附油孔鎢鋼柄

Order No.	Insert	Dimensions					Parts	Wrench
Right / Left		D	F	L	B	K°		
C10M-SDQCR07	DCMT0702	10	7	150	13	10°	CS25060 FT-7	
C12Q-SDQCR07	DCMT0702	12	9	180	16	7°	CS25060 FT-7	
C16R-SDQCR07	DCMT0702	16	11	200	20	6°	CS25060 FT-7	
E10Q-SDQCR07	DCMT0702	10	7	180	13	10°	CS25060 FT-7	
E12R-SDQCR07	DCMT0702	12	9	200	16	7°	CS25060 FT-7	
E16R-SDQCR07	DCMT0702	16	11	200	20	6°	CS25060 FT-7	
S10M-SDQCR/L07	DCMT0702	10	7	150	13	10°	CS25060 FT-7	
S12M-SDQCR/L07	DCMT0702	12	9	150	16	8°	CS25060 FT-7	
S16Q-SDQCR/L07	DCMT0702	16	11	180	20	6°	CS25060 FT-7	
S20R-SDQCR/L07	DCMT0702	20	13	200	25	6°	CS25060 FT-7	
S16Q-SDQCR/L11	DCMT11T3	16	11	180	20	6°	CS35095 FT-15	
S20R-SDQCR/L11	DCMT11T3	20	13	200	25	8°	CS35095 FT-15	
S25R-SDQCR/L11	DCMT11T3	25	17	200	32	4°	CS35095 FT-15	
S32S-SDQCR/L11	DCMT11T3	32	20	250	38	4°	CS35095 FT-15	
S40T-SDQCR/L11	DCMT11T3	40	24	300	46	3°	CS35095 FT-15	
S50U-SDQCR/L11	DCMT11T3	50	35	350	62	2°	CS35095 FT-15	